


Headroom

The Headroom is the distance between the ceiling to the lintel. Now days architects are limited to design to low headroom, due to restrictions of the pitch of the roofs.

Below is a chart showing the different types of low-headroom kits available

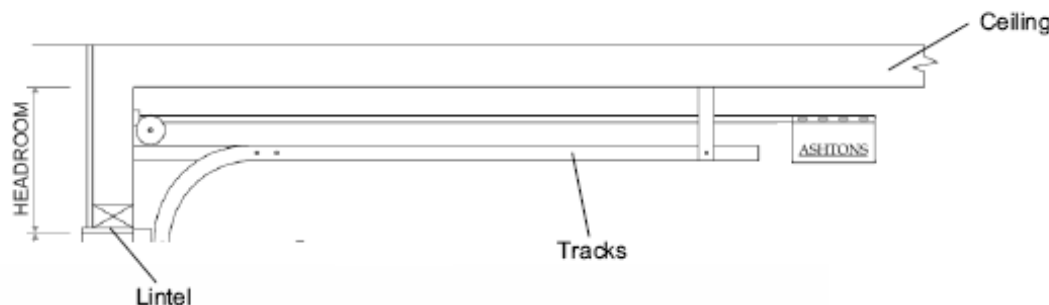

Description	Minimum Headroom Required (mm including Operator)	Motor Closing	Self Closing Top Panel	See Figure
Standard Equipment	320	✓	✓	-
LHR Double Track Front Mount	250	✓	✓	11.3
LHR Double Track Rear Mount	200	✓	✓	11.4
O & E Kit	200	✓	✗	11.2
LHR Easy Fit Kit	180	✓	✗	11.1
SLHR Double Track Front Mount	100	✓	✓	11.5
SLHR Double Track Rear Mount	100	✓	✓	11.5

Notes

- 1) With no operator, headroom may be reduced a further 50mm from the above figures.
- 2) Headroom figures above is a indicative only. Some installations may require less headroom.
- 3) Up to 200mm headroom is required in order for bottom panel or strut to completely clear opening.
- 4) Double track system accommodates use of opposite hand end bearing and flag brackets to standard installation.

0800 ASHTONS (274 866)
www.ashtondoors.co.nz